



Copy Like Day (Copy Reference Channel)


If the Delta is a negative number, use the **Copy Like Day (Copy Channel Reference)**.

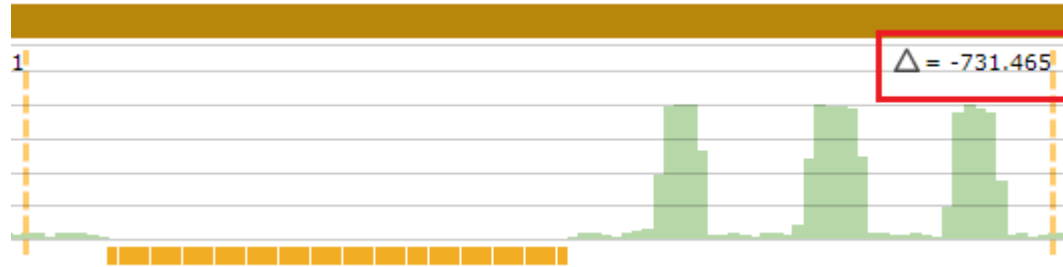

Click the **Edit (pencil)** icon to go to the graphed intervals.

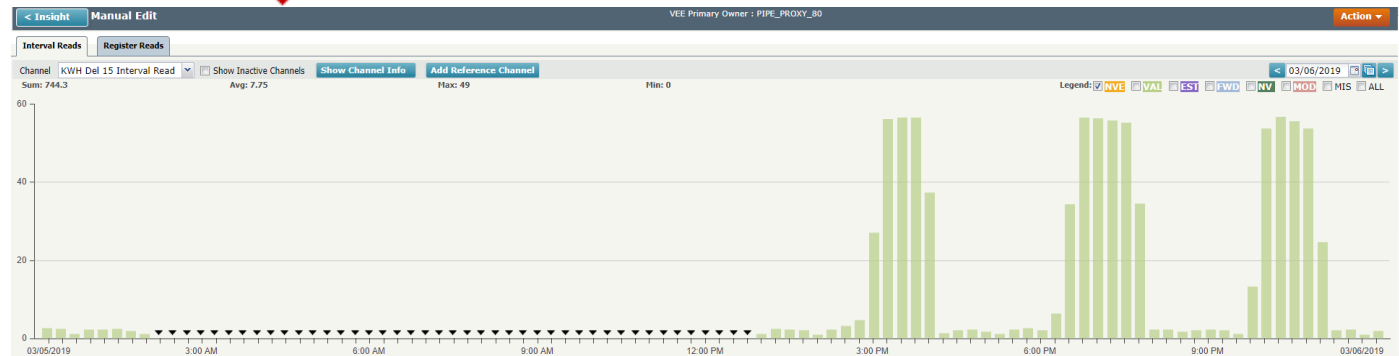

Make sure all NVE intervals are marked with an arrow above them.

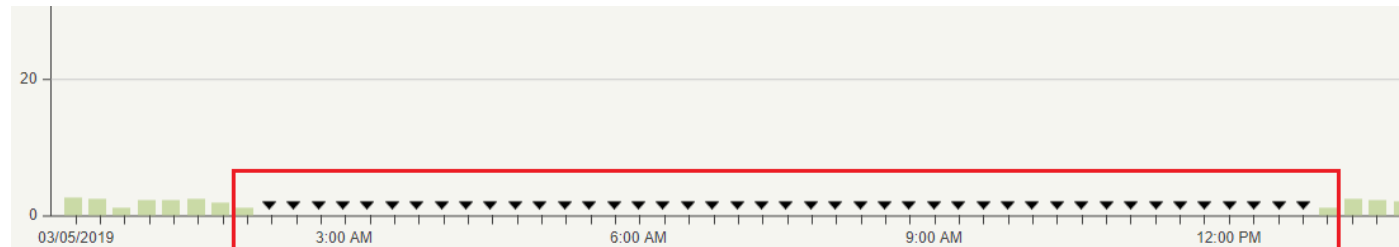

Click **Add Reference Channel** button at top of graphed interval screen.

Interval Reads Register Reads

Channel KWH Del 15 Interval Read Show Inactive Channels Show Channel Info **Add Reference Channel**


Sum: 744.3 Avg: 7.75 Max: 49

At **Choose Reference**.

Select **Same Service Point**.

Click **GO** (enabled after selecting a reference point).

SELECT A REFERENCE CHANNEL

CHOOSE REFERENCE Select 

SELECT SIMILAR

- Same Service Point
- SDP's on Premise
- Service Point UDC Id
- Input Channel Ref
- Class Load Profile

SDP Ref	ADU
---------	-----

SELECT DATE RANGE

March 2019

S	M	T	W	T	F	S
24	25	26	27	28	1	2
3	4	5	6	7	8	9
10	11	12	13	14	15	16
17	18	19	20	21	22	23
24	25	26	27	28	29	30
31	1	2	3	4	5	6

Same Day Last week

Same Date Last Month

Same Date Last Year

CHANNEL INFO

UDC ID

Status

Channel Number

Data Source

Preview Channel Data

The **SDP Ref**(erence) populates.

Click on the **down arrow** to see the channel description(s).

Make sure the correct data channel is selected with the green checkmark.

SELECT A REFERENCE CHANNEL

CHOOSE REFERENCE Same Service Point

SELECT SIMILAR

SDP Ref	Address	ADU
▼ 218503		
<input checked="" type="radio"/> ✓ KWH Del 15 Interval Read		

SELECT DATE RANGE

March 2019

S	M	T	W	T	F	S
24	25	26	27	28	1	2
3	4	5	6	7	8	9
10	11	12	13	14	15	16
17	18	19	20	21	22	23
24	25	26	27	28	29	30
31	1	2	3	4	5	6

Same Day Last week

Same Date Last Month

Same Date Last Year

CHANNEL INFO

UDC ID

Status
Active

Channel Number
1658496

Data Source
NORTHSTAR

Choose from

- Same Day Last Week
- Same Date Last Month
- Same Date Last Year

OR

Manually select a date with confirmed good data.

SELECT A REFERENCE CHANNEL

CHOOSE REFERENCE Same Service Point 218503 GO

SELECT SIMILAR

SDP Ref	Address	ADU
▼ 218503		
<input checked="" type="radio"/> KWH Del 15 Interval Read		

SELECT DATE RANGE

February 2019						
S	M	T	W	T	F	S
27	28	29	30	31	1	2
3	4	5	6	7	8	9
10	11	12	13	14	15	16
17	18	19	20	21	22	23
24	25	26	27	28	1	2
3	4	5	6	7	8	9

Same Day Last week

Same Date Last Month

Same Date Last Year


CHANNEL INFO

UDC ID

Status Active

Channel Number 1658496

Data Source NORTHSTAR

Preview Channel Data  Cancel Add

Click **Preview Channel Data**.

Note: Channel Info section will auto-populate based on channel selected using radio button.

View a preview of the data from the selected timeframe.

SELECT A REFERENCE CHANNEL

CHOOSE REFERENCE

SELECT SIMILAR

SDP Ref	Address	ADU
▼ 218503		
<input checked="" type="radio"/> ✔ KWH Del 15 Interval Read		

SELECT DATE RANGE

◀
February 2019
▶

S	M	T	W	T	F	S
27	28	29	30	31	1	2
3	4	5	6	7	8	9
10	11	12	13	14	15	16
17	18	19	20	21	22	23
24	25	26	27	28	1	2
3	4	5	6	7	8	9

Same Day Last week

Same Date Last Month

Same Date Last Year

CHANNEL INFO

UDC ID

Status

Channel Number

Data Source

Preview Channel Data ▲
[Cancel](#)

If the preview looks good, click **Add**.

SELECT A REFERENCE CHANNEL

CHOOSE REFERENCE

SELECT SIMILAR

SDP Ref	Address	ADU
▼ 218503		
<input checked="" type="radio"/> ✔ KWH Del 15 Interval Read		

SELECT DATE RANGE

◀
February 2019
▶

S	M	T	W	T	F	S
27	28	29	30	31	1	2
3	4	5	6	7	8	9
10	11	12	13	14	15	16
17	18	19	20	21	22	23
24	25	26	27	28	1	2
3	4	5	6	7	8	9

CHANNEL INFO

UDC ID


Status

Channel Number


Data Source

Preview Channel Data ▲
Cancel
Add

An overlay of data from the copied day will appear on the interval graphed data.

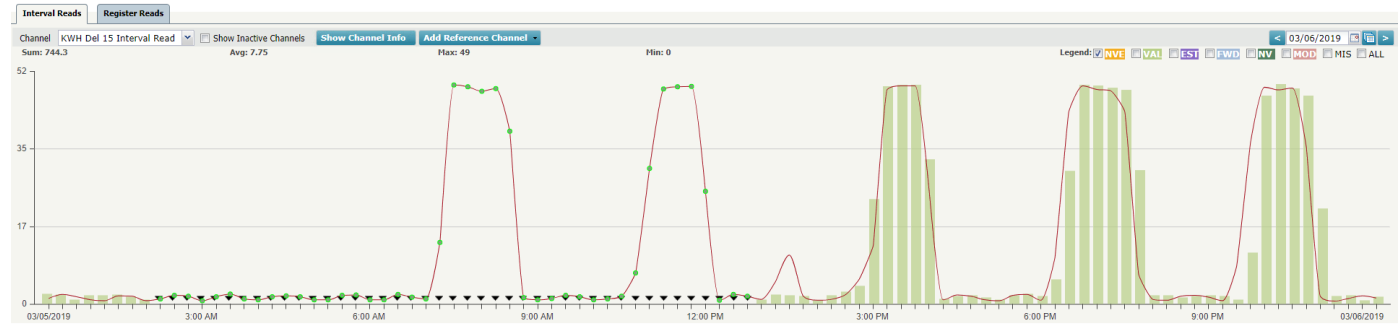

Green dots on the overlay indicate where the interval reads will insert.

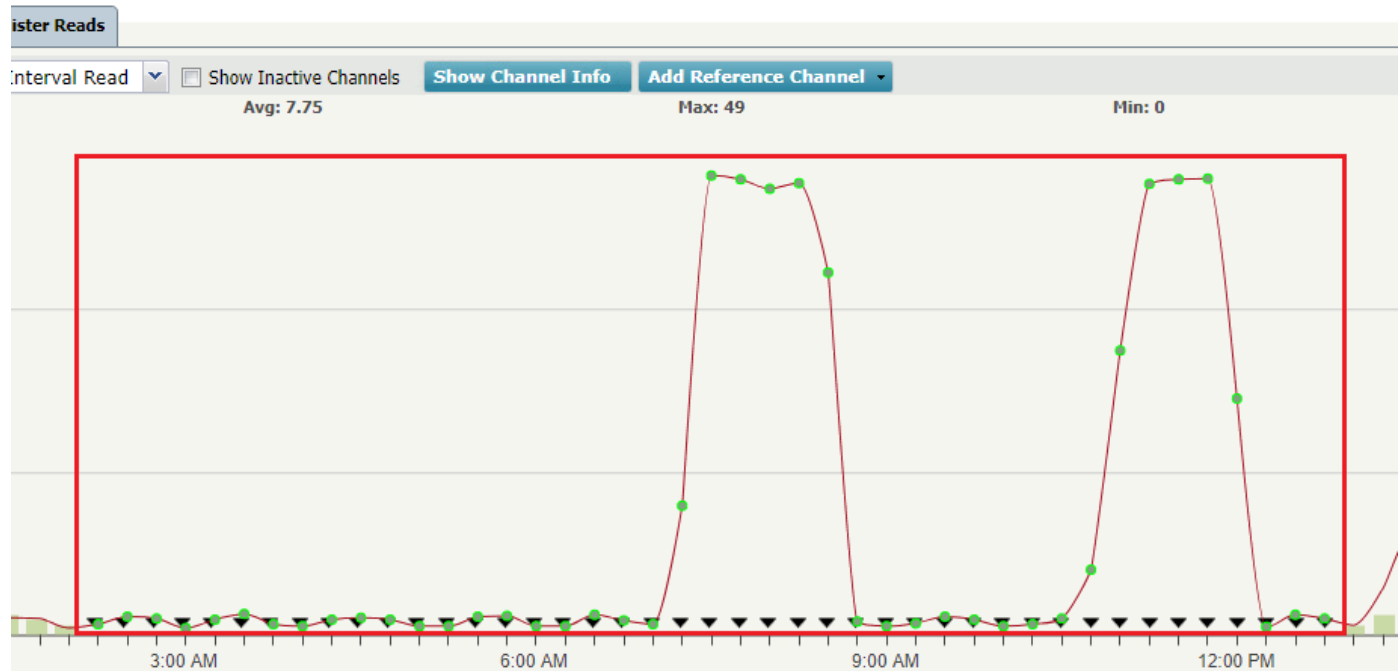

Compare to other reads on interval graph and to the values shown on the Data tab below the graphed intervals.


Channel : 1658496, KWH Del 15 Interval Read											Ref. Channel : 1658496, KWH D...				
Read Time	Value	Raw	Validation St...	Change Meth...	Lock	Meter Serial #	Source	Source Detail	Last Updated...	Last Updated...	Flags	Failures	Interval End Date/Time	Read Value	Validation Status
<input type="checkbox"/> 03/05/2019 00:15:00	2.2		VAL				Sensus	AMR	PIPE_PROXY...	03/06/2019 ...	0		02/26/2019 00:15:00	1.3	VAL
<input type="checkbox"/> 03/05/2019 00:30:00	2.1		VAL				Sensus	AMR	PIPE_PROXY...	03/06/2019 ...	0		02/26/2019 00:30:00	2.2	VAL
<input type="checkbox"/> 03/05/2019 00:45:00	1		VAL				Sensus	AMR	PIPE_PROXY...	03/06/2019 ...	0		02/26/2019 00:45:00	1.7	VAL
<input type="checkbox"/> 03/05/2019 01:00:00	1.9		VAL				Sensus	AMR	PIPE_PROXY...	03/06/2019 ...	0		02/26/2019 01:00:00	1	VAL
<input type="checkbox"/> 03/05/2019 01:15:00	2		VAL				Sensus	AMR	PIPE_PROXY...	03/06/2019 ...	0		02/26/2019 01:15:00	0.8	VAL
<input type="checkbox"/> 03/05/2019 01:30:00	2.1		VAL				Sensus	AMR	PIPE_PROXY...	03/06/2019 ...	0		02/26/2019 01:30:00	1.9	VAL
<input type="checkbox"/> 03/05/2019 01:45:00	1.6		VAL				Sensus	AMR	PIPE_PROXY...	03/06/2019 ...	0		02/26/2019 01:45:00	1.8	VAL
<input type="checkbox"/> 03/05/2019 02:00:00	1		VAL				Sensus	AMR	PIPE_PROXY...	03/06/2019 ...	0		02/26/2019 02:00:00	0.8	VAL

Note: Additional intervals for copying may be selected at this time on the overlay graph if other reads do not appear "quite right."


Go to the **Edit Section** on lower right side of screen.

Select **Copy Reference**.


Click **Set Value**.

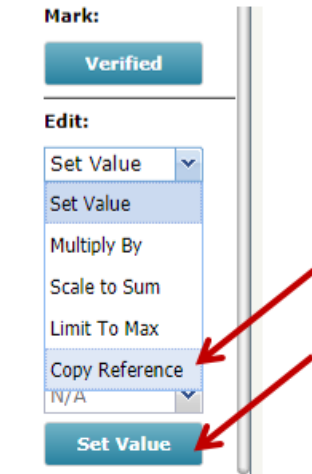

Set Value adds the copied intervals to the interval graph in pink hue.

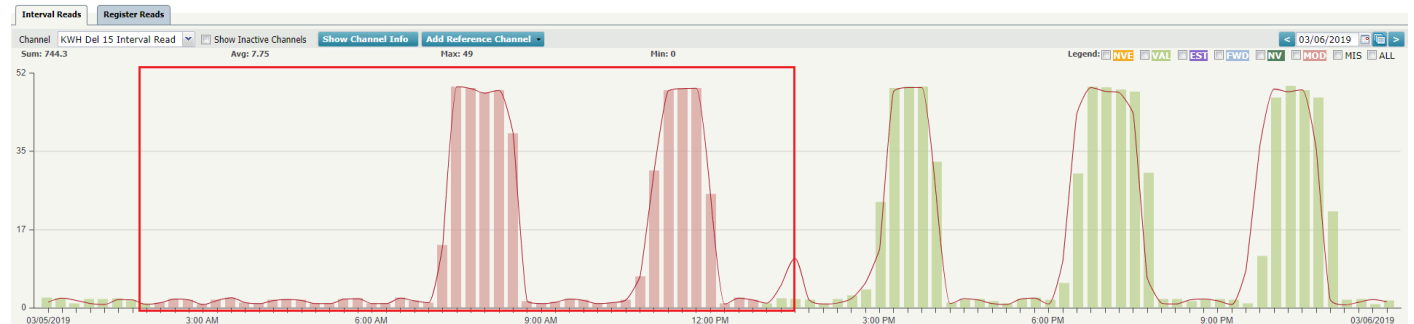


Click the **Actions** button.

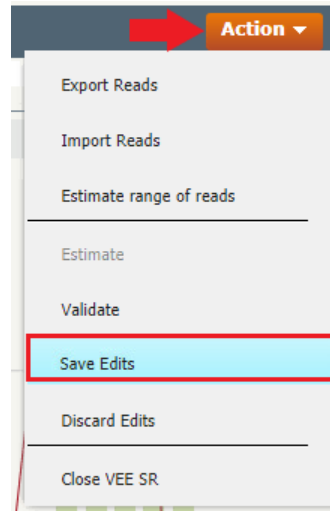


Click **Save Edits**.

An **Edit Meter Data** dialog box will pop up. Click **Save**.

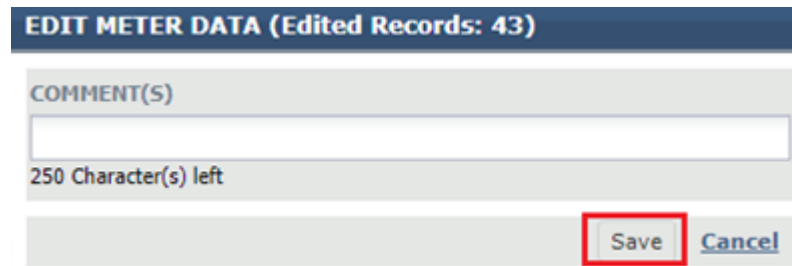


Note: If copied reference data is not what you want, click Action and select Discard Edits.

The saved intervals change to **purple** indicating estimated data.

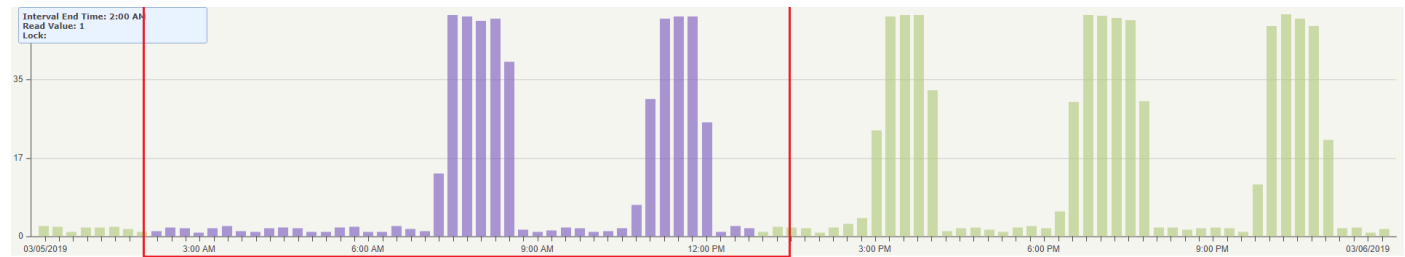

The overlay view is removed.

After verifying ALL service requests, close the VEE service request(s) using the **Action** button at the top of the screen.

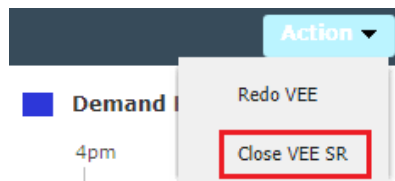


Click **Close VEE SR**.



Select the service requests that have completed the verification process.

Place a **checkmark** in the box to the left of the SR ID.

Note: Review the Channel reference numbers. Different channel numbers means additional service requests to complete.

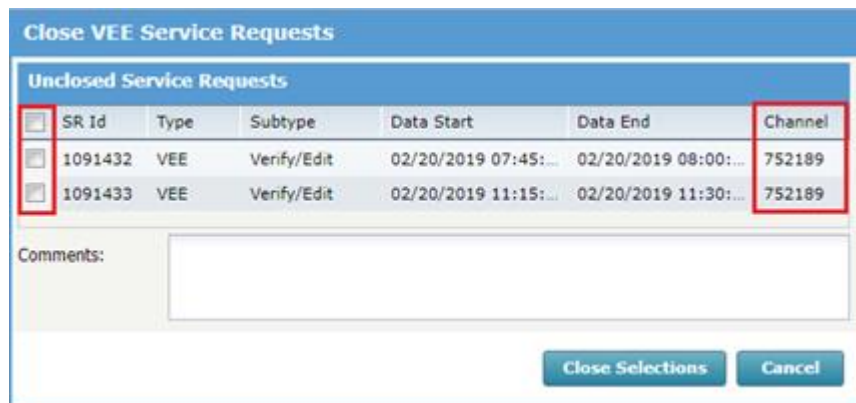

Click **Close Selections**.

