

Setup Requirements

Program Key Values

RemoteEnabled

Set **Value** to '1'.

Allows the display of the 'Load Remote' checkbox from the Credit Control > Auto Load screen.

Setups > Setups > Standard > Program Key Values > Program Key Values Setup

Program Key Values Setup (BROWSE)

131 of 151

OK Cancel

Environment Values

Name: RemoteEnabled

Value: 1

User:

Description: to allow the display of the 'Load Remote' checkbox from the Credit Control->Auto Load screen.


Ready

Note: If a Program Key Value is missing from the Program Key Values Setup table, add it to the Program Key Values Description Setup table. For assistance, submit a WSC ticket.

RemoteSched

Set **Value** to 'R'.

This is the status of an order where remote actions are possible.

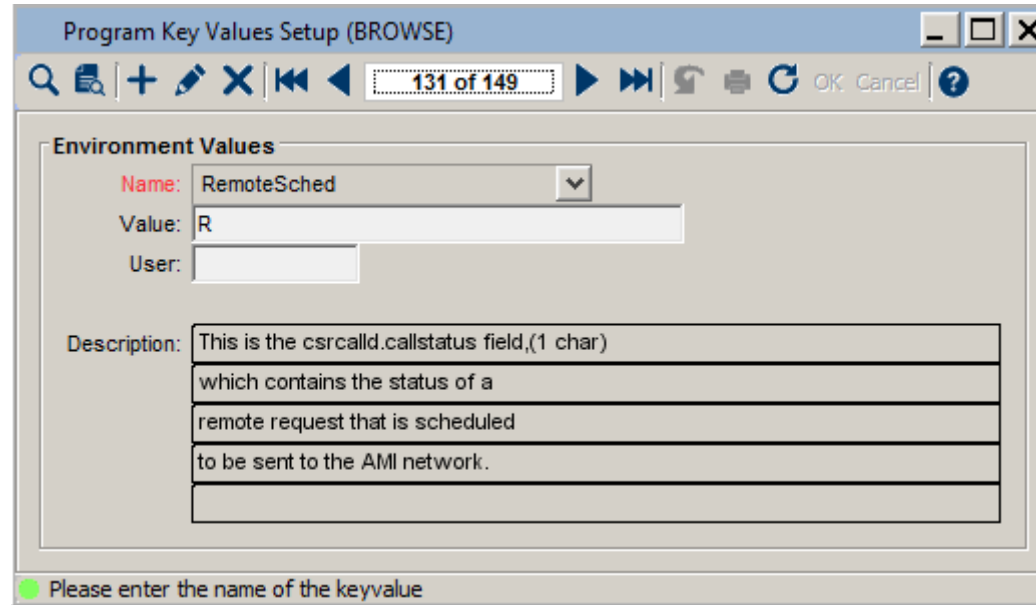

The screenshot shows a window titled "Program Key Values Setup (BROWSE)" with a toolbar at the top containing search, add, edit, delete, and navigation icons. A progress indicator shows "131 of 149". The main area is titled "Environment Values" and contains the following fields:


- Name:** RemoteSched (dropdown menu)
- Value:** R (text input)
- User:** (empty text input)
- Description:** This is the csrccald.callstatus field,(1 char) which contains the status of a remote request that is scheduled to be sent to the AML network.

A green status bar at the bottom reads "Please enter the name of the keyvalue".

RemoteSent

Set **Value** set to 'P'.

This is the status of an order after a successful remote action request.

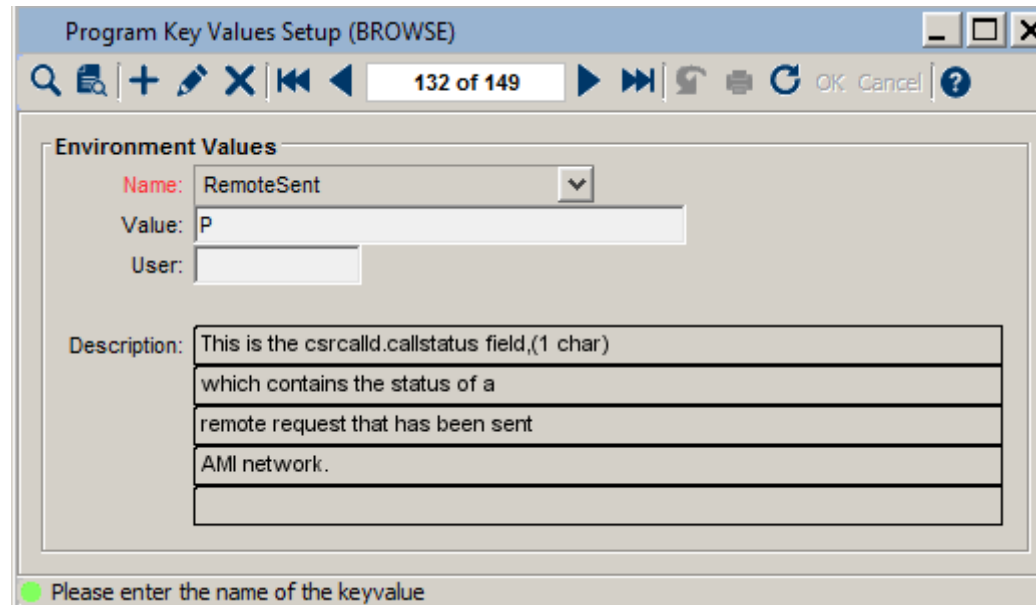

The screenshot shows a window titled "Program Key Values Setup (BROWSE)" with a toolbar at the top containing search, add, edit, delete, and navigation icons. A progress indicator shows "132 of 149". The main area is titled "Environment Values" and contains the following fields:

- Name:** RemoteSent (dropdown menu)
- Value:** P (text input)
- User:** (empty text input)
- Description:** This is the csrccald.callstatus field,(1 char) which contains the status of a remote request that has been sent AML network.

A green status bar at the bottom reads "Please enter the name of the keyvalue".

RemoteFail

Set **Value** to 'F'.

This is the status of an order after an unsuccessful remote action request.

The screenshot shows a window titled "Program Key Values Setup (BROWSE)". The "Environment Values" section is active, showing a dropdown menu for "Name" set to "RemoteFail", a text field for "Value" containing "F", and an empty "User" field. A "Description" text area contains the text: "This is the csrccald.callstatus field,(1 char) which contains the status of a remote request that has been received a failure notice from the AMI network." At the bottom, a green status bar reads "Please enter the name of the keyvalue".

Call Status Codes

Verify the call status codes 'F', 'P', and 'R' exist in the Call Status Codes table. These correspond to the settings used in the Program Key Values.

CARe > Call Status Codes

The screenshot shows a window titled "Call Status Codes Setup (BROWSE)". On the left, the "Call Status Maintenance" section has fields for "Status:" (C), "Description:" (CO), and "Short description:" (CO). On the right, a table displays the following data:

Status	Short desc	Long desc
C	COMPLETED	COMPLETED
F	Failed AMI	Failed AMI Transactions
L	LOGGED	LOGGED CALLS
P	PENDING	PENDING
R	Schd AMI	Scheduled AMI Remote Action
S	SCHEDULED	SCHEDULED
V	VOIDED	VOIDED

A green status bar at the bottom reads "Use the navigation buttons to br".

Customer Properties / NorthStar Properties

Submit a WSC ticket to WPPI for setup assistance.

This step creates the URL that allows Utilities to use the remote actions Move Orders feature.

Note: WPPI Staff will add the following URL to the Customer Properties table. The Remote Actions features will not be enabled until this step has been completed.

ns.remote.actions.moves.url

(example: <http://mdmservices.wppienergy.org/energyip/northstar/finalreads/send/utilityID#>)